
GYPCEIL PERFORATED SYSTEM - L

Acoustics Performance

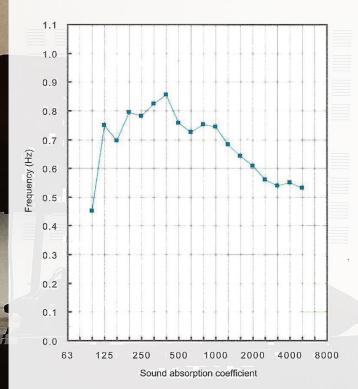

These measurements meet the requirements of ISO 354.All measurements were carried out on standard boards with acoustic tissue laminated on the back.

11111 11111 11111 11111 MINI MINI MINI MINI

IIIII IIIII IIIII IIIII

IIIII IIIII IIIII IIIII

MIN MAN MAN MAN HIN HIN HIN HIN

11111 11111 11111

IIII IIIII IIIII IIIII

IIII IIII IIII IIII

IIII IIIII IIIII IIIII

WIN WIN WIN WIN IIII IIII IIIII IIIII

The construction height specifies the distance between the undersides of the suspended ceiling and the existing

The board's sound absorption is affected by the construction height and by any mineral wool installed behind them.

Product description

Modular size	1200x2400x12.5mm	
Hole size	6x80mm	
Perforated area	13%	

Surface

Painting is done on site after filling the joints. The boards are painted with a short hair roller.

Advantage

Four tapered edges help with quick and easy jointing and aesthetics.

Technical data



Acoustic performance NRC=0.73

