


**AWP-FOLDOR PANEL** 

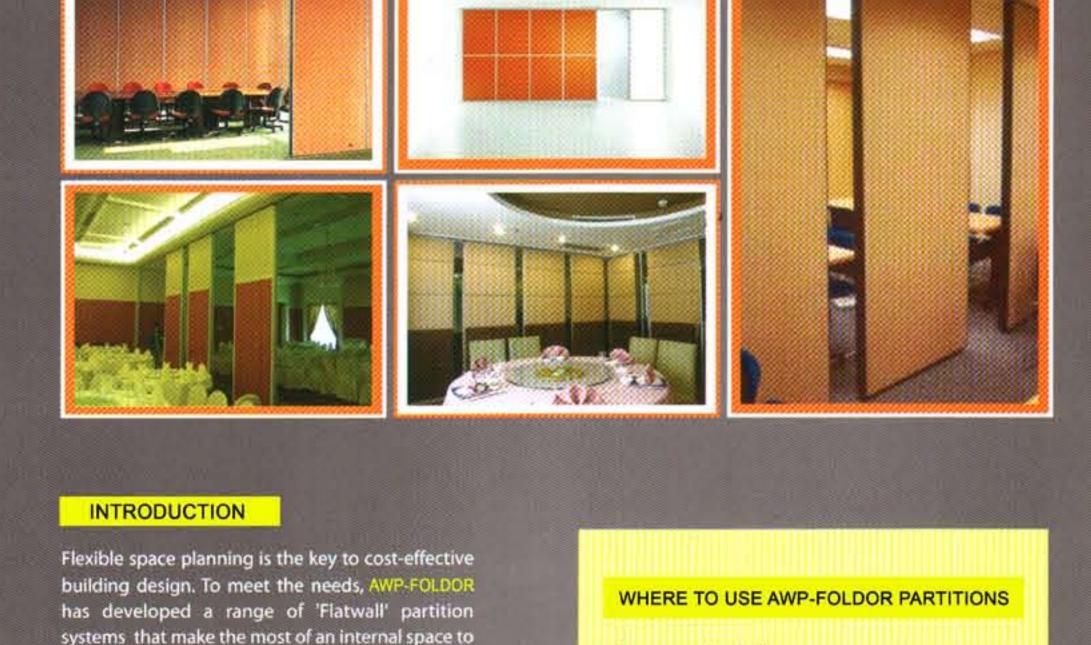

# or where space is at a premium.

optional items.

32 dB to 52 dB. The systems are custom-made and all partition panels are based on a strong and rigid steel frame that is built to last. AWP-FOLDOR acoustic movable partitions are supplied in bare finish thus it is versatile to meet your interior designing needs. PVC, laminates, painting, timber veneers and fabrics are some of the commonly used finishes that can be applied

on the panels. The single or double leaf pass doors can be fitted within the panels. Accessories including pin and chalkboard are available as

multi-purpose buildings - such as hotels, schools,

exhibition and conference areas, restaurants,

community buildings, leisure and sports centres -

AWP-FOLDOR acoustic movable partition systems

are practical, durable, and presentable and it offers flexible, effective sound reduction with

Sound Transmission Class (STC) ranging from

an inspection on a typical construction against criteria defined in DIN standards 1050, 1055, 52210, 31000. The consequent test result was issued on 08.06.84 and was confirmed that the products meet those technical standards. **FEATURES** ACOUSTIC PERFORMANCE The high quality particle boards on each side of the panel are attached

## audio-visual areas multi-purpose rooms

plus flexible use of space is needed

meeting rooms / lecture halls

training and conference areas

cafeterias

convention halls

banquet halls

auditoriums

classrooms

- fellowship halls
- stage areas, including drama and music rooms any place where reliable sound control

10,100

SINGLE LEAF

PASS-DOOR

"AWP-FOLDOR"

"AWP-FOLDOR"

TWO (2) WHEELS MULTI-DIRECTIONAL

TROLLEY WITH BOLT ( NO 13 )

CARRIAGE

FOUR (4) WHEELS TROLLEY WITH BOLT

to the frame by small, sturdy, spaced brackets thus achieving Laboratory test noult for the AWP-FOLDOR reflects an attenuation rating of 50dB Rw. maximum separation possible between the boards and the frame which contributes greatly to the high attenuation performance achieved in test of a three (3) panel partitions.

Since our partitions are used by people in the working, social or meeting environment, AWP-FOLDOR has commissioned

## DURABILITY Robust, steel framed construction ensures panel strength,

depending on the models.

**PASS DOOR** The single or double leaf pass doors can be fitted within each individual panel where it can be served as an entrance. (a) Minimum height of a panel is 2.4m. The construction for panels and doors is of strong rectangle tube sections welded into the basic frame shape. Door hinges are heavy duty type incorporated thrust bearings. Panels and doors have retractable seals, standard hardware and heavy duty lock.

The acoustic value was tested to the requirements of ASTM E-90-75.

The Sound Transmission Class (STC) value ranges from 32 - 52 dB

rigidity and stability. The high density 15mm thick material

boards give additional strength and dimensional stability.

This ensures a product that gives consistently high return of trouble

free operation in use with minimum maintenance.

(b) The "L" type construction combine adjacent panels


(c) A door panel is alternatively hinged to jamb

must be taken of partition height.

post at either extreme of the opening. Since the panel is the same height as other panels, account

painting, timber veneers and fabrics depending on the interior designing needs.

each having a door hinged to the single leg element so that the doors open as a double

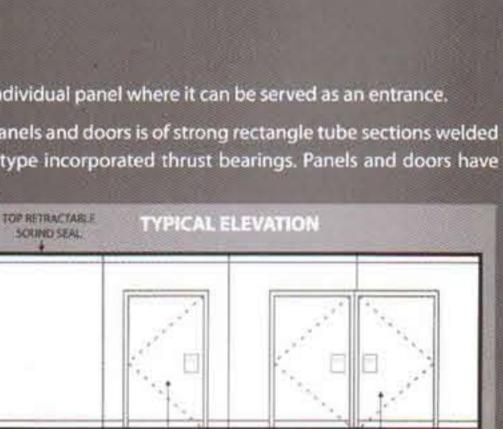

DOUBLE LEAF

PASS-DOORS

Empuency (Hz)

3200

## **AESTHETICS/FINISHES** Once extended into place, AWP-FOLDOR operable walls form a clean, uninterrupted surface. Their edges create only a fine line separating the panels and the operable walls are supplied in bare finish. The particle boards mounted on each side

FLEXIBILITY

door facility.

can be equipped with 'T' junction or 'X' junction that fulfills every specifications. Optional, right angle turn system allows panels to be reversed easily, permitting unique storage layouts that facilitate panel use in multiple locations. SERVICES The company supports its products with technical advice, drawings, site surveys, installation, after sales service and maintenance as required, requested or necessary. All these are carried out by our well-trained and professional personnel.

38mm x 75mm x 4mm THK "U" BRACKET

9mm ≠ x 13mm ( L ) ADJUSTABLE ROD

HEAVY DUTY ALUMINIUM TRACK NO 15

38mm x 75mm x 4mm THK "U" BRACKET

"AWP-FOLDOR"

( max height = 4500mm )

( max height = 5500mm )

B. SITE OR REMOTE STACK WITH RIGHT ANGLE TURN THROUGH X, T OR

L FUNCTION WITH TWO TROLLEYS PER PANEL SUSPENSION USING

**ALUMINIUM TRACK NO.13 OR NO.16** 

The availability of many systems present a selection of configurations to fit any applications. In addition, the systems

of the panel can support and accommodate any decorative finishes required or specified, inclusive of PVC, laminates,

BOTTOM RETRACTABLE

SOUND SEAL


TRACK AND TROLLEY SYSTEM

75

A. CENTRE STACK WITH ONE CENTRE TROLLEY

CARRIAGE USING ALUMINIUM TRACK NO 15

9mm Ø x 13mm ( L ) ADJUSTABLE ROD "AWP-FOLDOR" HEAVY DUTY MULTI DIRECTIONAL **ALUMINIUM TRACK NO 13** 

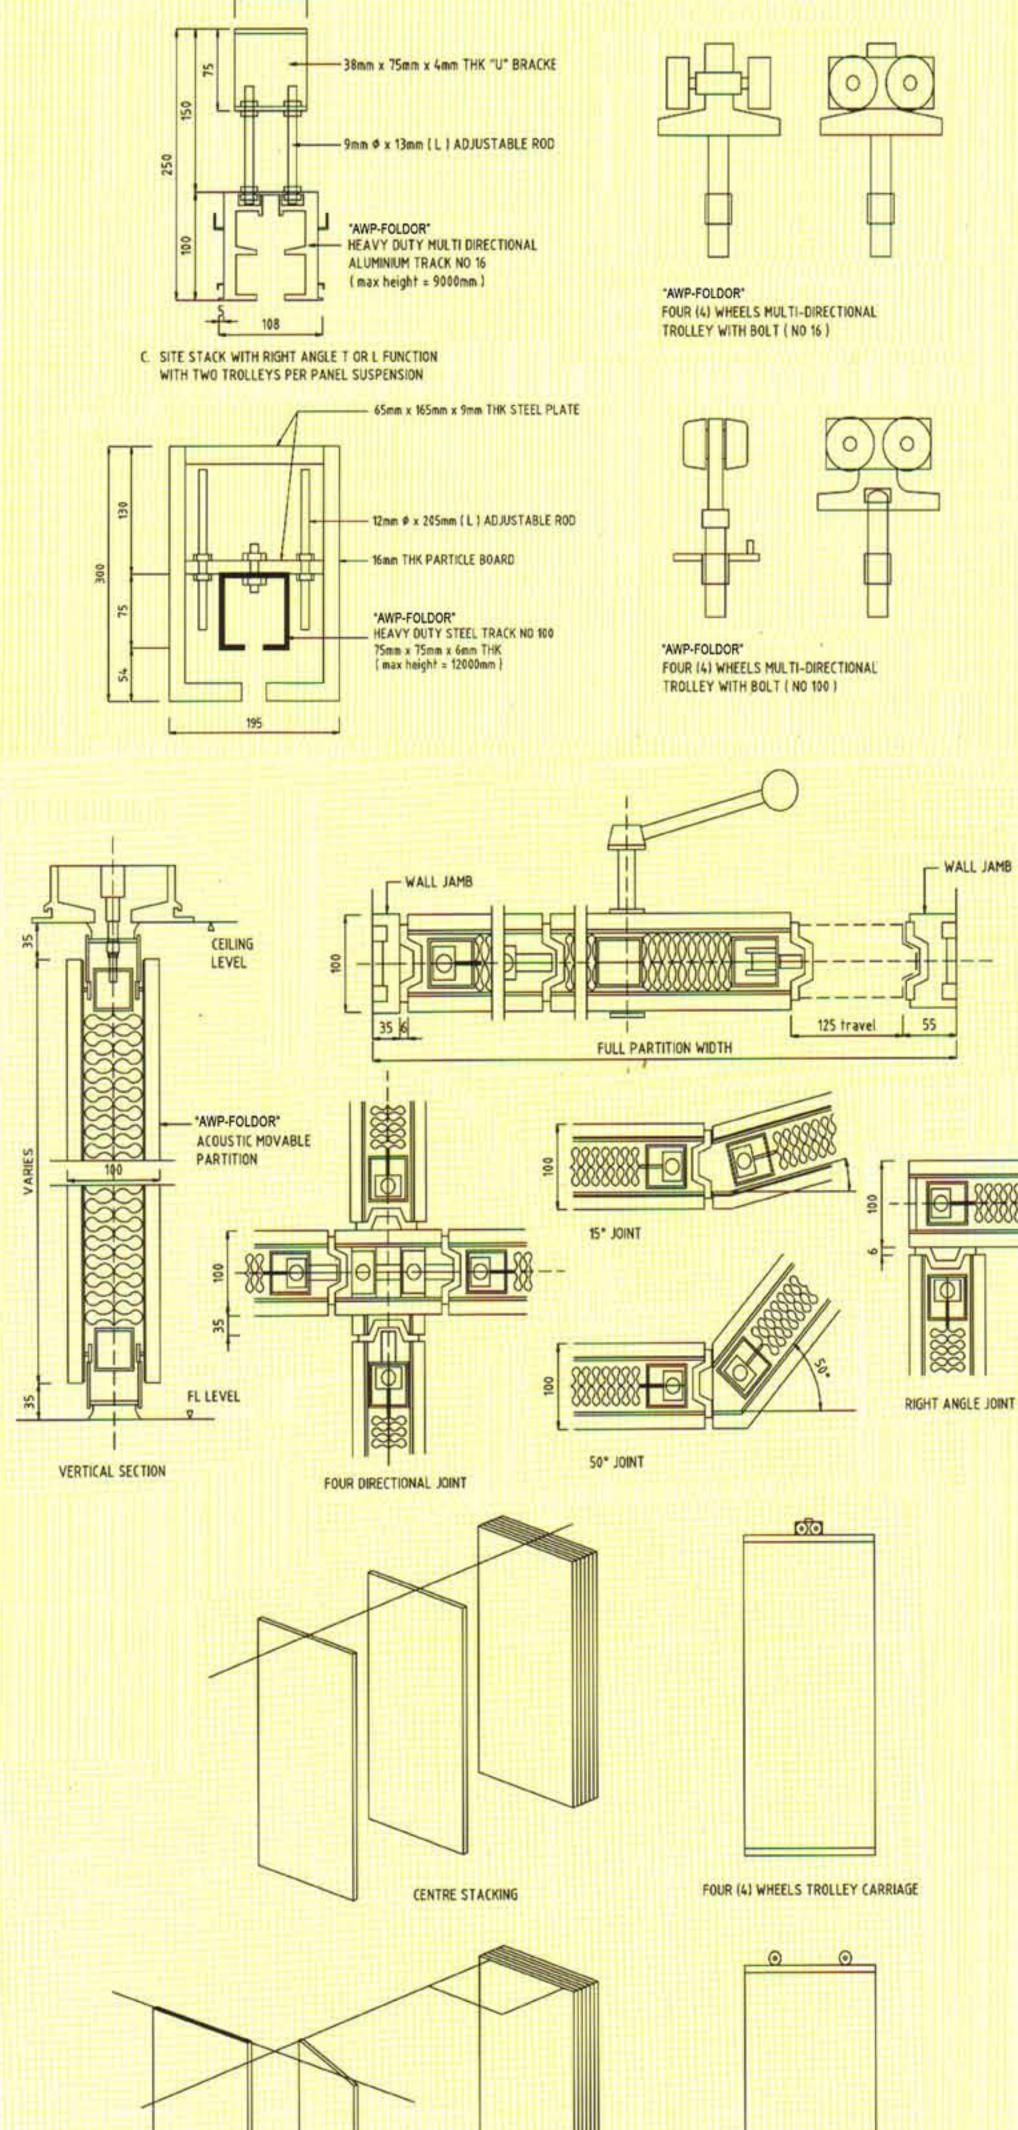

SIDE STACKING

MULTI DIRECTIONAL TROLLEY